

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/043124 A1

(51) International Patent Classification⁷: **H05K 9/00**

(21) International Application Number:
PCT/IB2003/004647

(22) International Filing Date: 20 October 2003 (20.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/SG02/00301
8 November 2002 (08.11.2002) SG

(71) Applicant (for all designated States except US): KONIN-
KLIJKE PHILIPS ELECTRONICS N.V. (NL/NL);
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and
(75) Inventors/Applicants (for US only): KWONG, Kam, C.

[MY/SG]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL). LU, Ee, L. [SG/SG]; c/o Prof. Holstlaan 6, NL-5656
AA Eindhoven (NL).


(74) Agent: SCHRIJNEMAËKERS, Hubert, J., M.; Philips
Intellectual Property & Standards, Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: HIGH-FREQUENCY DEVICE

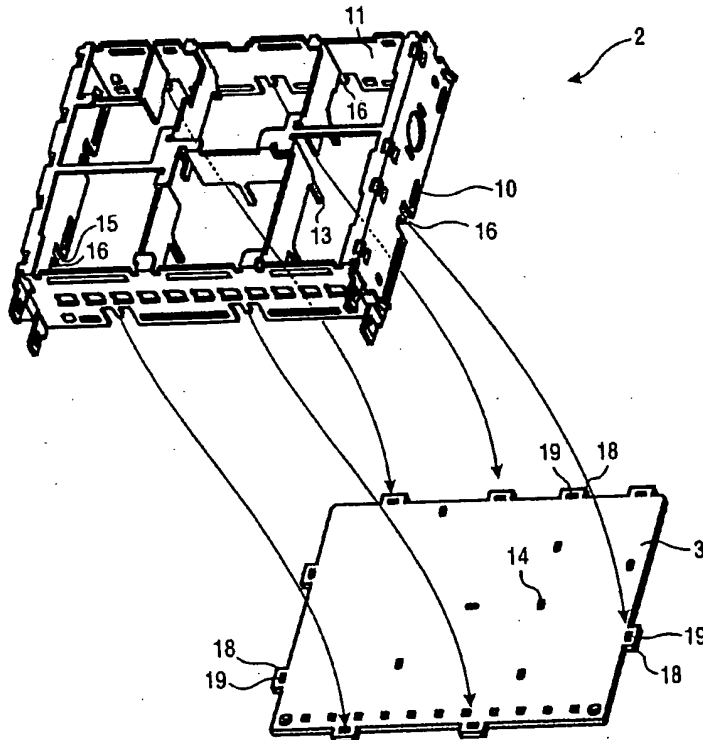

(57) Abstract: A high-frequency device comprises a frame (2) provided with walls (12; 9-11) and leg sections (13; 16) extending from said walls. Said device further comprises a printed circuit board (3) extending perpendicularly to said walls, wherein said leg sections extend through holes (14; 19) in said printed circuit board and are connected to the printed circuit board by means of solder. At least one outer side wall of said frame is provided with at least one leg section which extends through a hole located in a part of said printed circuit board, which part extends through said outer side wall.

WO 2004/043124 A1